



DATASHEET
CY-SFP-LC1

SFP Optical Module
1.25G Single Optical Fiber 20km




This is a standard SFP optical module. It uses a single mode optical fiber and the speed rate can up to 1.25Gbps, transmission distance up to 20 km. This product need to use in pair and match up with converter and optical Ethernet switch with SFP port, it can be used in Ethernet, telecom and optical communication and other industries...

fiber
fiber

Feature

- Use SFP packaging form, LC connector, support SFF8472 standard;
- Support hot plug ;
- Transmitter use 1310nm FP laser and 1550PIN-TIA;
Receiver use 1550nm FP laser and 1310nm PIN-TIA;
- The data transmission distance of single mode optical fiber can up to 20 km;
- Data input and output ports are comply with the low voltage emitter coupled logic(LVPECL) standard;
- Low electromagnetic interference to the environment, strong ESD protection;
- Meet IEC-60825 laser safety standard;
- Meet RoHS standard.

Board diagram

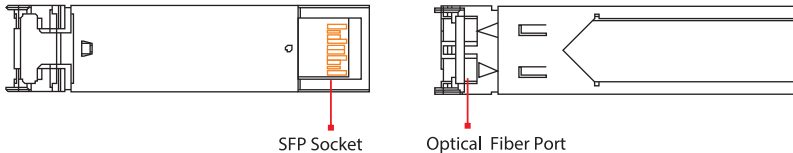

Installation step

Please check the following items before installation. If any missing, please contact the dealer.

- SFP Optical Module, 1.25 G Single Optical Fiber 20km 1pc
- User manual 1pc

Please follow the following step

- 1) Please turn off the signal source and the device's power, installation with power on may damage the device;
- 2) Plug 1.25G single optical fiber 20km SFP optical module into SFP socket;
- 3) Check if the installation is correct and device is good, make sure all the connection is reliable and power up the system;
- 4) Make sure the optical communication is normal.

■ Specification

Item		Description
Power	Power Supply	The Host Power Supply
	Voltage Range	DC 3.15V~3.45V
	Consumption	1W
Optical Characteristics	Optical Wave Length	1310nm/1550nm and 1550nm/1310nm;
	Emission Light Power	-8~-3dBm
	Receiver Sensitivity	-24 dBm
Transmission Characteristics	Optical Fiber Type	Single mode 9/125um
	Optical Fiber Port	LC
	Transmission Distance	Single mode 20km
Protection	ESD	1a contact discharge 3 level 1b air discharge 3 level Per : IEC61000-4-2
Environmental	Working Temperature	0℃ ~70℃
	Storage Temperature	-40℃ ~70℃
	Humidity (Non-condensing)	0~95%
Mechanical	Dimension (L×W×H)	55.4mm×13.7mm×6.25mm
	Material	Stainless steel
	Color	White
	Weight	17g

Product are subject to change without prior notice

■ Trouble Shooting

Please find the following solution when the device doesn't work

- Please confirm if the installation is correct;
- Please confirm the module plugged is match with the requirement;
- If the problem still exist, please contact the factory.

CYGNUS
electronics

