

## Waterproof PoE Extender

Model: POE-014PW



### Features:

#### 1、100Mbps fast Ethernet

- ◇ Provide 5\*10/100Base-TX RJ45 port, the uplink port is a power port to facilitate flexible networking and meet the networking power supply and transmission requirements within 200 meters;
- ◇ All ports support non-blocking wire speed forwarding for smoother transmission;
- ◇ Support IEEE802.3x full duplex flow control and Back pressure half duplex flow control.

#### 2、Intelligent POE power supply function

- ◇ 4\*10/100BASE-T RJ45 ports support POE power supply, meeting the POE power supply requirements in various scenarios in the security field;
- ◇ Complies with IEEE 802.3af /at POE power supply standard, automatically identifies POE devices to supply power without damaging non POE devices. The maximum POE output power of a single port is 30Watt.


#### 3. Simple Operation

- ◇ Plug and play, no configuration, easy to use and maintenance;
- ◇ POE repeater can extend the network signal transmission distance and the POE power supply distance;
- ◇ When the extender works, no external power supply is needed, which can easily transfer the full bandwidth and power network cable within 200 meters.

### Specifications:

Product interface	4*10/100Base TX POE port (Data/Power ) 1*10/100Base-TX upstream PD port (Data/Power)
Transmission distance	100BASE-T: Cat3,4,5 UTP(≤100meter) 100BASE-TX: Cat5 or later UTP(≤100meter)
POE Power Supply standard	IEEE 802.3af/at
Network protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3x
Power Supply Type	1/2(+), 3/6(-)
Maximum POE power	30Watt
Working temperature	-20℃~60℃

### Connection diagram:

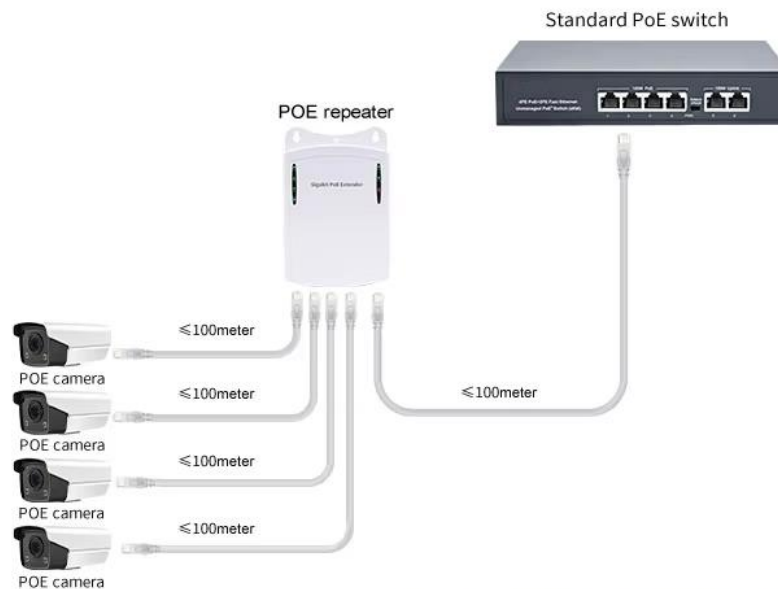

Tips: The total power of POE camera should be less than the single port output power of POE switch