

# DATASHEET CY-S108



# 8-Port Unmanaged Gigabit Switch

6KV Surge Immunity | 8KV ESD Protection | Three Operating Mode | Switching Loop Detecting

### CY-S108




- 8\*10/100/1000Mbps RJ45 ports.
  - IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3x.
  - Three operating modes (Default, VLAN, CCTV).
  - Loop detection: loop fault, LED alarm prompts the user to check the loop port in real time
    - Excellent performance of anti-interference, 6KV surge immunity & 8KV ESD protection.
    - Plug and play.

CEFE


### **Overview**

The unmanaged gigabit switch is specially designed for HD video surveillance and network engineering, providing 8\*10/100/1000Mbps RJ45 ports. The switch supports three operating modes (Default, VLAN, CCTV). Under default mode, the switch supports detection for switching loop, and reminds you to checkthe loop-occurred port in real time through alarming LED indicator.


### **Application**

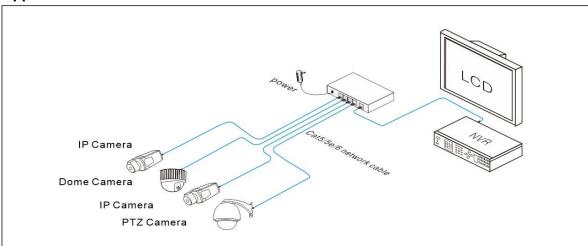

### **Physical Features**



### **Interface Drawing**





# Specification -

Model	CY-S108	
Downlink Ports	8*10/100/1000Base-T ports	
Network Standard	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3X	
Switch Capacity	16Gbps	
Throughput	11.54 Mpps	
Switch Processing Scheme	Store and Forward	
Memory Buffer	2.5Mbps	
MAC Table	4K	
Jumbo Frame	9КВ	
One-key Smart	Default: Support detection for switching loop. All port can be communicated freely.	
	VLAN: Port 1-6 are isolated respectively, but can communicate with Port 7-8.	
	CCTV: The rates of Port 1-8 are limited to 10M but with transmission distance of 150 meters.	
Lightning Protection	6KV Execute: IEC61000-4-5	
ESD	6KV Contact discharge 16KV Air discharge Execute: IEC61000-4-2	
Power Supply	Desktop power adapter, DC 2.1 Jacket	
Power Input	AC: 100~240V- 50~60Hz	
Power Output	DC: 5V- 1A	
Surge on Power Supply	Common mode - 6KV, Difference mode - 4KV	
Power Consumption	<5W	
Work Temperature	-10°C~50°C	
Storage Temperature	-40°C~85°C	
Humidity (Non-condensing)	10%-90% (Non-condensing)	
Dimension (L*W*H)	180mm*92mm*25mm	
Weight	1kg	
Certification	CE, FCC, ROHS	

# **Packing List**

Item	Quantity
CY-S105	1
Power Adapter	1
User Manual	1

